

LIQUID SPRAY SYSTEM

NEW

LSS6190

Pick Up - Commercial vehicles - Pickup trucks



Tank - UV resistant high density polyethylene

Electric Pump System

PVC bar with 9 nozzles

**Driven by the
vehicle's battery**

12V

24V



EASY

**Assembly
disassembly**



Maintenance



**Fertilizers - Sanitizers -
Anti-ice liquid**



**Low acoustic
impact**



The Buyers liquid spray system are completely independent and ultra-durable, the main structure is high-density and UV-resistant Polyethylene, which gives the anti ice strength and lightness. Corrosion resistant, it allows the use of any type of anti-ice liquid mixture. The large capacity of the tanks allows you to cover long stretches of road. Easily mounts on trucks and trucks.



▲ LSS6190120
Capacity lt 210



▲ LSS6190150
Capacity lt 800



▲ LSS6190160
Capacity lt 1230



▲ LSS6190170
Capacity lt 2100

MODEL STANDARD

LSS6190120 Capacity lt 210



- ✓ Anti-UV polyethylene tank
- ✓ **KIT** - On / off control and wiring cables ★
- ✓ Electric motor for pump
- ✓ PVC spray bar complete with 9 adjustable nozzles
- ✓ Anchor straps
- ✓ Instruction booklet



MODEL STANDARD

LSS6190150 Capacity lt 800



- ✓ Anti-UV polyethylene tank
- ✓ **KIT** - On / off control and wiring cables ★
- ✓ Electric motor for pump
- ✓ PVC spray bar complete with 9 adjustable nozzles
- ✓ Anchor straps
- ✓ Instruction booklet



MODEL STANDARD

LSS6190160 Capacity lt 1230



- ✓ Anti-UV polyethylene tank
- ✓ **KIT** - On / off control and wiring cables ★
- ✓ Electric motor for pump
- ✓ PVC spray bar complete with 9 adjustable nozzles
- ✓ Anchor straps
- ✓ Instruction booklet



MODEL STANDARD

LSS6190170 Capacity lt 2100



- ✓ Anti-UV polyethylene tank
- ✓ **KIT** - On / off control and wiring cables ★
- ✓ Electric motor for pump
- ✓ PVC spray bar complete with 9 adjustable nozzles
- ✓ Anchor straps
- ✓ Instruction booklet



TECHNICAL FEATURES & DESCRIPTION

LSS6190120



Capacity lt 210

MINIMUM PLATFORM BASE
mm

Width 570 - Depth 940

Weight kg

Empty 23 - Full ± 233

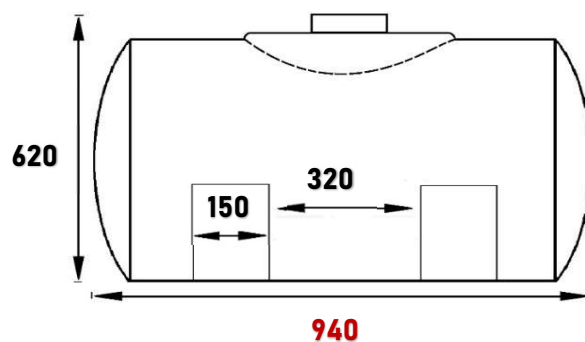

LSS6190160



Capacity lt 800

MINIMUM PLATFORM BASE
mm

Width 990 - Depth 118

Weight kg

Empty 40 - Full ± 840

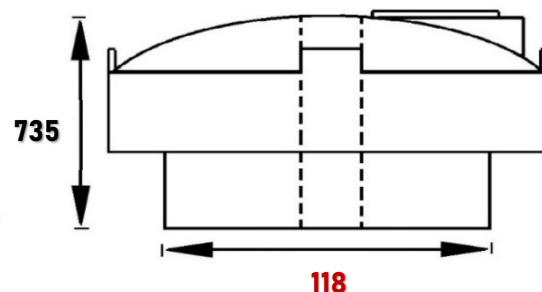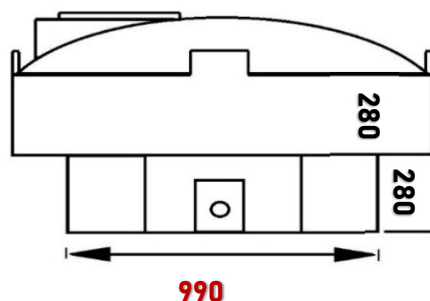

LSS6190170



Capacity lt 1230

MINIMUM PLATFORM BASE
mm

Width 1220 - Depth 1575

Weight kg

Empty 50 - Full ± 1280

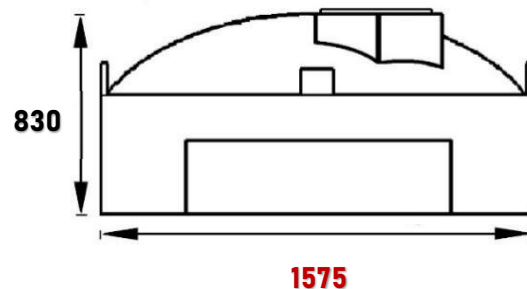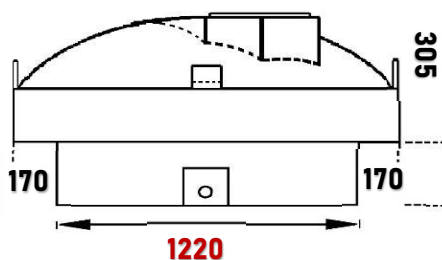

LSS6190150



Capacity lt 2100

MINIMUM PLATFORM BASE
mm

Width 1220 - Depth 1980

Weight kg

Empty 73 - Full ± 2173

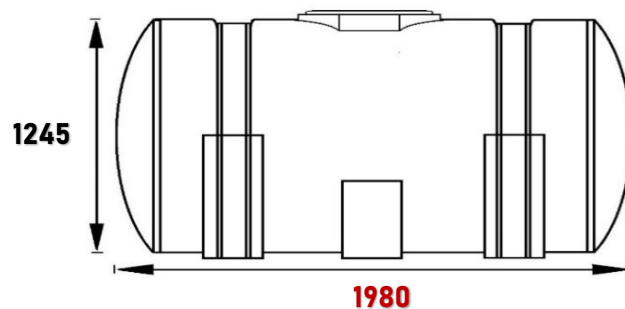

Electric drive

The anti-ice is powered by the battery of the vehicle on which it is mounted. No additional battery is needed, the vehicle's alternator is easily able to support the consumption of the high-efficiency engine. Compared to traditional systems, this system has no fuel consumption (ecological and economical), has low maintenance, the 12 volt engine is powered directly by the battery.

► Vehicle battery



12V - 24V

Reservoir

► Anti-corrosion and resistant polyethylene

UV-resistant high-density Polyethylene tank. For reliable and corrosion-resistant liquid storage.



Electric pump / Bar


Electric pump

12V electric pump, has a flow rate of 23 lt./min., powered by the battery of the vehicle on which it is mounted.



Bar

PVC spray bar, with 9 adjustable nozzles. The nozzles adjust for proper surface coverage and are removable for easy cleaning and maintenance when the system is not in use.



Wiring & Control

① Alimentation cable

N°1 wiring harness - Made with Ø 10 gauge automotive cable with fireproof sheath, watertight multi-pole plugs.



Manual control



ON / OFF

MAINTENANCE - ASSEMBLY - ANCHORS - OPTIONAL



ASSEMBLY ON THE VEHICLE

Integrated mounting system. No drilling is necessary. The 4 anchoring brackets fixed directly in the hopper make installation and removal simple by a single person. The 4 ratchet straps supplied allow for secure anchoring to the vehicle.



MAINTENANCE

► ① Cleaning the tank with water

Whenever possible clean the tank with water, even better with a pressure washer. At the end of the season simply wash the hopper with water. Store the pump in a dry place with appropriate grease, to avoid oxidation of the contacts.



► ② Electrical contact lubricant

Grease the contacts of the electrical wiring with appropriate grease to avoid oxidation, with consequent malfunction of the salt spreader. Store the control unit in a dry place.

IMPORTANT



Antioxidant
lubricant

OPTIONAL


► KIT - REEL

Adjustable gun and nozzle

3039076



15 MT hose on spring loaded retractable reel

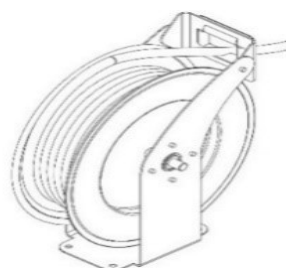

ADJUSTABLE GUN

