




**Salt spreaders – Snow plows
Liquid spreaders**

www.snowtrading.eu



Powered by battery

of the vehicle at 12V / 24V



**Let's solve the problem of snow and ice on
the roads**

**We supply snow plows and spreaders for
assembly on Pick Ups, Off-Road Vehicles, Vans,
Trucks, Quads, Utility Vehicles and agricultural
vehicles.**



Product sales program

12



SNOW PROBLEM



NO PROBLEM

Our solutions to solve your problems

Manual

Capacity Lt
from 45 to 95




Tailgate

Capacity Lt
from 60 to 320



Flatbed

Capacity Lt
from 350 to 6500



Plows

Length mm
from 1800 to
2940



Liquid spray system

Capacity Lt
from 210 to 2100



WHO WE ARE

Distributor for Europe of snow plows and salt spreaders produced by Buyers, leaders in the sector.



Present on the winter road market since 2012

Produced by



Certificate



Warranty



Headquarters - Spare parts warehouse

Via Caduti Senza Croce N° 17
Loc. Baggiovara (MO) ITALY
Tel +39 059 512252

Electric salt spreaders 12V - 24V



Spreader in high-density Polyethylene (HDPE), double-walled (patented), anti-corrosion, obtained by rotational molding with smooth angled walls to maximize the flow of the material, 3 12V electric motors, making it economical/ecological. They can also be used for products such as: sand, gravel fertilizer, fertilizers.

Works with the car battery



EASY
Assembly
disassembly
Maintenance



Low
acoustic
impact



Fertilizer
spreader, sand,
peat, flax



Salt, salt/
sand mixture
and sand



Electric plows 12V - 24V



Aileron composed of: powder-coated steel frame in RAL 9011 color made up of 6/8 vertical ribs and 3/8 horizontal tubular reinforcement. Moldboard in 1.2mm AISI 304 stainless steel anchored to the frame. Everything is moved by an electro-hydraulic pump.


Works with the car battery




EASY
Assembly
disassembly
Maintenance



Spring
shockproof
safety system



RapidLink®



Liquid spray system 12 V - 24V



Liquid spray system, the main structure is high density polyethylene and resistant to UV rays, which gives the anti ice strength and lightness. Corrosion resistant, it allows the use of any type of anti-ice liquid mixture. Equipped with a 12V electric pump, a PVC spray bar, complete with 9 adjustable dispensers. The tank can also be used with products such as: fertilizers and sanitisation.

Works with the car battery



EASY
Assembly
disassembly
Maintenance



Fertilizers - Sanitizers -
Anti-ice liquid



Low
acoustic
impact



POLY SPREADERS

WB - Walk



WB155BG
Capacity lt 45



WB400
Capacity lt 95

Measurements mm	Height	800	890
	Length	670	1110
	Depth	570	470
Weight kg	Empty	25	30
	Full ±	80	148
MT spreading radius		1 / 3	800 mm

WB155BG

Dispenser ⑥
positions




Deflectors in anti-corrosion
polyethylene, adjustable to
direct the direction of the
salt



Structure
composed of a
single piece of
welded steel



Salt drop bar,
in stainless
steel



The quantity of salt
is regulated by a
dosing lever on the
handle with ⑥
different positions

WB400



ATVS - Bracket connection 12V



ATVS15A

Capacity lt 60



ATVS16



SIZES mm	Height	83	83
	Length	46	46
	Depth	46	46
Weight kg	Empty	20	20
	Full ±	98	98
MT spreading radius		1 / 4	1 / 4

Operation
with car
cigarette
lighter



Anti-corrosion
polyethylene
hopper



Powder coated
steel structure



Polyethylene disc Ø
200 mm



12V electric
motor



Range
mt 1 / 3

Manual
dispenser



TGS - Tailgate 12V / 24V

POLYETHYLENE HOPPER

Double wall®

MODELS:
06 - 02 - 03 - 07

KIT - CONTROL WITH CONTROLLER AND WIRING



MODELS: PROA - 06 - 02 - 03 - 07

GRAVITY / VERTICAL AUGER



TGSUV1B Capacity lt 125



TGSUVPROA Capacity lt 125



TGS06 Capacity lt 285



SIZES mm	Height	1000	1000	1000
	Length	550	550	1600
	Depth	520	520	690
Weight kg	Empty	33	33	70
	Full ±	189	189	440
MT spreading radius		4	1 / 9	1 / 9

HORIZONTAL AUGER FEED



TGSO2 Capacity lt 115



TGSO3 Capacity lt 225



TGSO7 Capacity lt 320



SIZES mm	Height	800	1160	1160
	Length	780	920	1350
	Depth	760	760	76
Weight kg	Empty	50	80	87
	Full ±	200	350	450
MT spreading radius		1 / 9	1 / 9	1 / 9


OPTIONAL

ALL TGS ADAPTABLE TO THE 3 POINT TRACTOR

3005345



SBH2 ATTACK

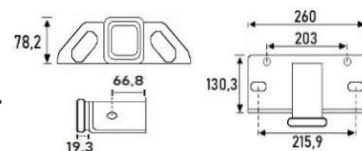


1804460

BRACKET



1804055 ATTACK




RVA24

BRACKET



1804005


EXTENSION



3038520

Just for TGS07

EXTENSION



SHPE - Flatbed 12V / 24V

► HOPPER
POLYETHYLENE



► COVERING COVER



► KIT - CONTROL WITH CONTROLLER AND WIRING



▲ SHPE0400
Capacity lt 350



▲ SHPE0750
Capacity lt 600



▲ SHPE1000
Capacity lt 800



Minimum base mm	Height	580	700	860
	Length	950	850	920
	Depth	850	1100	1500
Weight kg	Empty	120	122	155
	Full ±	550	900	1100
MT spreading radius		1 / 9	1 / 9	1 / 9



▲ SHPE1500
Capacity lt 1200



▲ SHPE2000
Capacity lt 1600



Minimum base mm	Height	960	1050
	Length	1000	1200
	Depth	1800	210
Weight kg	Empty	235	428
	Full ±	1500	2300
MT spreading radius		1 / 9	1 / 9

► Inside the 2.5 mm thick
AISI 304 stainless steel
tank houses the Ø 70 mm
colcea

BASIN



AUGER
STAINLESS STEEL
Ø 70 mm



► Vibrator LB 200



► Turret with polymer
disc



PRO - Flatbed 12V / 24V

► POLYETHYLENE HOPPER



► COVERING COVER



► KIT - CONTROL WITH CONTROLLER AND WIRING



▲ PRO2500 Capacity lt 2000




▲ PRO4000 Capacity lt 3200




Minimum base mm	Height	1100	1170
	Length	1200	1860
	Depth	2200	2400
Weight kg	Empty	360	406
	Full ±	2900	4200
MT spreading radius		1 / 9	1 / 9



▲ PRO6000 Capacity lt 4800



▲ PRO8000 Capacity lt 6500



Minimum base mm	Height	1380	1680
	Length	1930	1910
	Depth	3100	2950
Weight kg	Empty	600	760
	Full ±	6400	9000
MT spreading radius		1 / 9	1 / 9

► The AISI 304 stainless steel support structure is designed to support and give stability to the Polyethylene hopper



STRUCTURE

► Inside the 2.5 mm thick AISI 304 stainless steel tank houses the Ø 160 mm colcea



BASIN

AUGER
STAINLESS STEEL
Ø 160 mm



► Vibrator LB 200



► Turret



Polymer
2500

Stainless
steel AISI 304
4000 - 6000
8000



OPTIONAL

Roll-off support

▲ 3037145



PRO4000

PRO6000

1/4 inch black powder coated steel frame, sturdy and durable.

The built-in rollers make loading and unloading the salt spreader simple and smooth

Adjustable legs to adapt to the height of the vehicle

LED lights

▲ 149210

Rear light



Magnetic flashing light

▲ SL501A



Rear camera kit, for spreading control

▲ 8883010

► KIT



Screen

7 inches



SNOW PLOWS

MUT - Plows 12V

► MOLDBOARD

One-piece anti-corrosion
AISI 304 stainless steel



► KIT - CONTROL WITH CONTROLLER AND WIRING



▲ ▲ **MUT60**
Length 1800



Moldboard mm	Height	600
	Width. of work	1500
Knife thickness mm		10
Weight kg		180
Max ingombro		780

► FRAME

The frame supported by ④ steel ribs (laser cut) connected with a full length 1-3/8 inch cross tube offers maximum strength and stability across the entire blade. The structure that supports the moldboard is made of powder coated steel RAL 9011



► HYDRAULIC SYSTEM FOR MOVEMENTS


Driven by 1-1/2 inch hydraulic cylinders. Fast and agile operation, using the 70° attack angle



Sturdy 3/8 inch rubber hoses



Electro-hydraulic pump




► SHOCKPROOF

2 Steel return springs protect your equipment from street curbs and obstacles




Spring



RapidLink®


Attachment System - Electric quick release, between the spoiler and the vehicle, via a pin with pedal closure

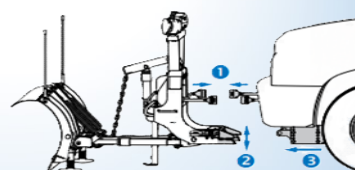

Adjustable slides



Universal bracket to adapt to your vehicle



MDII - Plows 12V - 24V

► MOLDBOARD

One-piece anti-corrosion
AISI 304 stainless steel



► KIT - CONTROL WITH CONTROLLER AND WIRING



▲ MDII68
Length mm 2030



▲ MDII75
Length mm 2280

▲ MDII80
Length mm 2450

Moldboard mm	Height	600	600	600
	Width. of work	1700	1980	2130
Knife thickness mm		10	10	10
Weight kg		180	190	200
Max overall dimensions		820	820	820

► CHASSIS

The frame supported by ⑥ steel ribs (laser cut) connected with a full length 1-3/8 inch cross tube offers maximum strength and stability across the entire blade. The structure that supports the moldboard is made of powder coated steel RAL 9011



► HYDRAULIC SYSTEM FOR MOVEMENTS


Driven by 1-1/2 inch hydraulic cylinders, it is quick and precise thanks to the 70° attack angle



Sturdy 3/8 inch rubber hoses



Electro-hydraulic pump




► SHOCKPROOF

2 steel return springs, protect the equipment from impacts on curbs and obstacles.



Spring



Adjustable slides



2 double-beam halogen headlights, with integrated indicator lights




Universal bracket to adapt to your vehicle



RapidLink®

Attachment System - Electric quick release, between the spoiler and the vehicle, via a pin with pedal closure

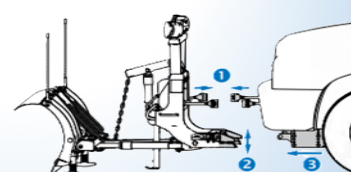

EXII - Plows 12V - 24V

► MOLDBOARD

One-piece anti-corrosion
AISI 304 stainless steel



► KIT - One-piece anti-corrosion AISI 304 stainless steel



▲ EXII80

Length mm 2440

▲ EXII85

Length mm 2590


▲ EXII90

Length mm 2743

Moldboard mm	Height	790	790	790
	Width. of work	2108	2243	2357
Knife thickness mm		10	10	10
Weight kg		347	356	365
Max overall dimensions		850	850	850

► CHASSIS

The steel frame is subjected to a complete RAL 9011 powder coating cycle with a double layer of two-component epoxy anti-rust primer and a double coat of polyurethane enamel. Supported by ⑧ steel ribs (laser cut) connected with a full length 1-3/8 inch cross tube, it offers maximum strength and stability across the entire blade

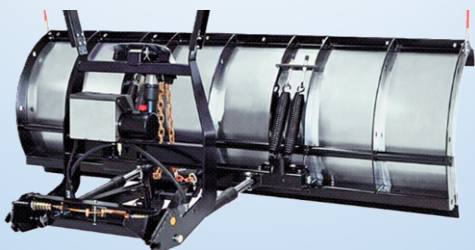

► HYDRAULIC SYSTEM FOR MOVEMENTS

Right and left rotation - The 1-1/2 inch hydraulic cylinder drive is quick and precise thanks to the 70° attack angle



Sturdy 3/8 inch
rubber hoses



Electro-
hydraulic
pump




► SHOCKPROOF

4 steel return springs and 2 shock absorbers protect the equipment from impacts on curbs and obstacles.

Spring



Shock absorber



Adjustable
slides



2 double-beam
halogen headlights,
with integrated
indicator lights




Universal bracket to
adapt to your vehicle



RapidLink®

Attachment System -
Electric quick release,
between the spoiler and
the vehicle, via a pin
with pedal closure

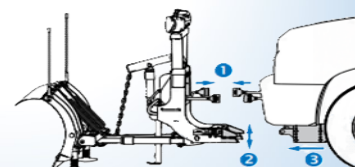

CMII - Plows 12V - 24V

► VERSIONBOARD

One-piece anti-corrosion
AISI 304 stainless steel



CMII90
Length mm 2740



► KIT - CONTROL WITH CONTROLLER AND WIRING



CMII100
Length mm 3050

CMII110
Length mm 3350

Moldboard mm	Height	790	790	790
	Width. of work	2340	2640	2940
Knife thickness mm		16	16	16
Weight kg		473	492	510
Max overall dimensions		850	850	850


► CHASSIS

The steel frame is subjected to a complete RAL 9011 powder coating cycle with a double layer of two-component epoxy anti-rust primer and a double coat of polyurethane enamel. Supported by ⑧ steel ribs (laser cut) connected with a full-length 1-3/8 inch cross tube, it offers maximum strength and stability across the entire blade



► HYDRAULIC SYSTEM FOR MOVEMENTS


Right and left rotation - the 1-1/2 inch hydraulic cylinder drive is quick and precise thanks to the 70° attack angle



Sturdy 3/8 inch rubber hoses



Electro-hydraulic pump




► SHOCKPROOF

6 steel return springs and 2 shock absorbers protect the equipment from impacts on curbs and obstacles.

Spring



Shock absorber



Adjustable slides



2 double-beam halogen headlights, with integrated indicator lights




Universal bracket to adapt to your vehicle



RapidLink®

Attachment System - Electric quick release, between the spoiler and the vehicle, via a pin with pedal closure

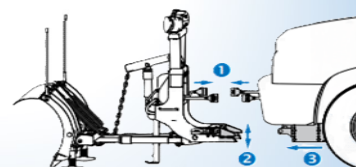

LIQUID SPRAY SYSTEM

LS6190 - Liquid spreaders 12V - 24V

NEW



▲▲ LSS6190120
Capacity lt 210



▲▲ LSS6190150
Capacity lt 800

Minimum base mm	Height	620	735
	Length	570	990
	Depth	940	118
Peso KG	Empty	23	40
	Full ±	233	840
MT spreading radius		1	1



▲▲ LSS6190160
Capacity lt 1230



▲▲ LSS6190170
Capacity lt 2100

Minimum base mm	Height	830	1245
	Length	1220	1220
	Depth	1575	1980
Peso KG	Empty	50	73
	Full ±	1280	2173
MT spreading radius		1	1

PVC spray bar, with 9 adjustable nozzles



12V electric pump, has a flow rate of 23 lt./min



► KIT - MANUAL ON/OFF CONTROL COMMAND, WIRING



► OPTIONAL KIT - NASPO



UV-resistant high-density Polyethylene tank. For reliable and corrosion-resistant liquid storage




Commercial

Our offices are at your complete disposal to satisfy customers' needs on PRE / POST sales.



Spare parts warehouse

Our spare parts warehouse in MODENA is stocked with all possible parts that can be replaced over time.

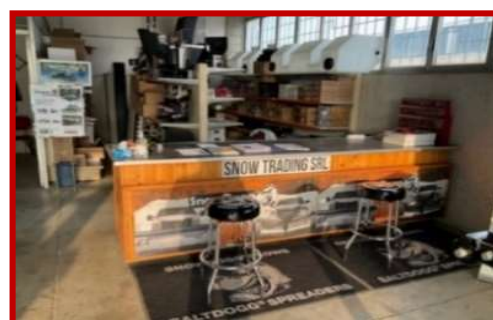

Snow emergency

ecommerce spare parts
SHOP - www.snowtrading.eu

Delivery



IN 24/48 ORE



WHERE WE OPERATE



Dealers

Romania - Spagna - Francia
Svizzera - Ukraine



B2B

Svezia - Finlandia - Lituania -
Polonia- Germania - Austria -
Kosovo - Bosnia - Macedonia
- Slovenia - Ungheria -
Bulgaria



Tel + 39 059 512252 - Sito www.snowtrading.eu - Email info@snowtrading.eu



Snow Trading

Sede

Tel + 39 059 512252

info@snowtrading.eu



Commerciale

+39 335 8217618

www.snowtrading.eu