

**SALT SPREADER - SNOW PLOW BLADES - LIQUID SPREADERS**



## Product catalog

*Machines and optional*

**2025 - 2026**

### Salt spreader



### Snow plow blades



### Liquid spreaders



**SNOW PROBLEM**

**NO PROBLEM**



# INDEX

## **SALT SPREADER**

*Push Manuals*

**WB** *Page 3*

*Electric with roof rack  
bracket*

**ATVS**  
*Page 3/4*

*Electric with tow hook  
brackets*

**UTVS**  
*Page 4*

**TGS**  
*Page 4/5*



*Optional*  
**TGS**  
*Page 6/7*

*Electric for flatbed*

**SHPE**  
*Page 8/9*

**PRO**  
*Page 9/10*



*Optional*  
**SHPE -PRO**  
*Page 11*

## **SNOW PLOW BLADES**

**MUT60**  
*Page 12*

**MXII**  
*Page 12*

**EXII**  
*Page 13*

**CMII**  
*Page 14*

## **LIQUID SPREADERS**

**LSS6190**  
*Page 15*



*Optional*  
**LSS6190**  
*Page 15/17*

## **GENERALE**

*The advantages of the  
polyethylene hopper*  
*Page 18*

*The advantages of the electric  
system*  
*Page 18*

**Standard equipment****WB155BG**

Capacity Liters 45  
Measurements mm  
Height 800 - Width 670 - Depth 570  
Weight Kg 25  
Spreading width - mt 1/2

- Anti-corrosion polyethylene hopper.
- Fully welded carbon steel frame, powder coated black for excellent corrosion resistance.
- Lever-operated salt quantity dispenser with different positions to regulate the shutter opening
- Flow gate to manage the quantity of product to be spread
- 3 adjustable deflectors in anti-corrosion polyethylene, to orient the direction of the salt
- Large inflatable tires Ø 30 cm. Solid axle and nylon wheels filled with fiberglass for greater durability
- Anti-corrosion powder-coated steel grille
  - The enclosed gear box with grease nipple, protects the quality alloy gears, from weather, rust and cold
- PVC cover sheet
- Use and maintenance manual

**WB400**

Capacity Liters 95  
Measurements mm  
Height 890 - Width 1120 - Depth 400  
Weight Kg 25  
Spreading width - mt 800

- Anti-corrosion polyethylene hopper
- Fully welded carbon steel frame, powder coated black for excellent corrosion resistance.
- Stainless steel tub
- Lever-operated salt dispenser with different positions
- Large inflatable tires Ø 30 cm. Solid axle and nylon wheels filled with fiberglass for greater durability
- Anti-corrosion powder-coated steel grille
- PVC cover sheet
- Use and maintenance manual

**Electric with roof rack bracket****Standard equipment****ATV5100**

Capacity Liters 50  
Measurements mm  
Height 410 - Width 670 - Depth 480  
Weight / empty Kg 20 - full ± 80  
Spreading width - mt 1/3

- Anti-corrosion polyethylene hopper
- 12V Electric Motor
- Cigarette lighter socket cable with ON/OFF control
- Wiring
- Mounting bracket for luggage racks
- Dispenser with adjustable closure
- PVC cover sheet
- Spinner High density polyurethane Ø 200mm
- Carbon frame Powder coating
- Use and maintenance manual





## ATV515A



Capacity Liters 60  
Measurements mm  
Height 830 - Width 460 - Depth 460  
Weight / empty Kg 20 - full  $\pm$  98  
Spreading width - mt 1/3

- Anti-corrosion polyethylene hopper
- Fully welded carbon steel frame, powder coated black for excellent corrosion resistance.
- Cigarette lighter socket cable with ON/OFF control
- Mounting bracket for luggage racks
- Manually adjustable lever quantity dispenser with different positions
- 12V Electric Motor
- Spinner High density polyurethane Ø 200mm
- Polyethylene lid
- Deflector
- Use and maintenance manual



## Electric with tow hook brackets

### Standard equipment

## UTV516



Capacity Liters 60  
Measurements mm  
Height 830 - Width 460 - Depth 460  
Weight / empty Kg 20 - full  $\pm$  98  
Spreading width - mt 1/3

- Anti-corrosion polyethylene hopper
- Fully welded carbon steel frame, powder coated black for excellent corrosion resistance.
- Mounting bracket
- Manually adjustable lever quantity dispenser with different positions
- Cigarette lighter socket cable with ON/OFF control
- 12V Electric Motor
- Spinner High density polyurethane Ø 200mm
- Polyethylene lid
- Deflector
- Use and maintenance manual



## TGSUV18



Capacity Liters 125  
Measurements mm  
Height 1000 - Width 550 - Depth 520  
Weight / empty Kg 33 - full  $\pm$  180  
Spreading width - mt 4

- Anti-corrosion polyethylene hopper
- Fully welded carbon steel frame, powder coated black for excellent corrosion resistance.
- Cigarette lighter socket cable with ON/OFF control
- Manually adjustable quantity dispenser with different positions
- Electric motor 12V - 1/8 HP
- Spinner High density polyurethane Ø 200mm
- Corrosion-resistant powder-coated steel deflector
- Polyethylene lid with locking hooks
- Use and maintenance manual



## TGSUVPROA



Capacity Liters 125  
Measurements mm  
Height 1000 - Width 550 - Depth 520  
Weight / empty Kg 33 - full  $\pm$  180  
Spreading width - mt 4

- Anti-corrosion polyethylene hopper
- Fully welded carbon steel frame, powder coated black for excellent corrosion resistance.
- Regulation controller
- Wiring - 1 battery / 1 motors
- Electric motor 12V - 1/2 HP
- Spinner High density polyurethane Ø 200mm
- Vertical steel auger
- Corrosion-resistant powder-coated steel deflector
- Battery disconnect
- Polyethylene lid with locking hooks
- Use and maintenance manual



## TG506



Capacity Liters 285  
Measurements mm  
Height 1000 - Width 1600 - Depth 1320  
Weight / empty Kg 70 - full  $\pm$  410  
Spreading width - mt 1/9

- Anti-corrosion polyethylene hopper
- Wiring - 1 battery / 1 motors
- Regulation controller
- Electric motor 12V - 1/8 HP
- Spinner High density polyurethane  $\varnothing$  200mm
- 80LB Vibrator
- Lashing straps on the vehicle
- Drop-down with regulation shutter
- Corrosion-resistant powder-coated steel deflector
- Battery disconnect
- Polyethylene lid with locking hooks
- Use and maintenance manual



Double wall



## TG502



Capacity Liters 115  
Measurements mm  
Height 800 - Width 780 - Depth 760  
Weight / empty Kg 50 - full  $\pm$  200  
Spreading width - mt 1/9

- Anti-corrosion polyethylene hopper
- Fully welded powder coated steel frame for excellent corrosion resistance
- Regulation controller
- Wiring - 1 battery / 1 motors
- Electric motor 12V - 1/9 HP
- Spinner High density polyurethane  $\varnothing$  230mm
- Horizontal auger
- Drop-down with regulation shutter
- Adjustable polyethylene deflector
- Battery disconnect
- Polyethylene lid with locking hooks
- Use and maintenance manual



Double wall



## TG503



Capacity Liters 225  
Measurements mm  
Height 1160 - Width 1000 - Depth 760  
Weight / empty Kg 80 - full  $\pm$  350  
Spreading width - mt 1/9

- Anti-corrosion polyethylene hopper
- Fully welded powder coated steel frame for excellent corrosion resistance
- Regulation controller
- Wiring - 1 battery / 1 motors
- Electric motor 12V - 1/9 HP
- Spinner High density polyurethane  $\varnothing$  300mm
- Horizontal auger with stainless steel tank
- Drop-down with regulation shutter
- Adjustable stainless steel deflector
- Battery disconnect
- Polyethylene lid with locking hooks
- Lashing straps
- Use and maintenance manual



Double wall



## TG507




Capacity Liters 320  
Measurements mm  
Height 1160 - Width 1350 - Depth 1300  
Weight / empty Kg 86 - full  $\pm$  450  
Spreading width - mt 1/9

- Anti-corrosion polyethylene hopper
- Fully welded powder coated steel frame for excellent corrosion resistance
- Regulation controller
- Wiring - 1 battery / 1 motors
- Electric motor 12V - 1/9 HP
- Vibrator 200LB
- Spinner High density polyurethane  $\varnothing$  300mm
- Horizontal auger with stainless steel tank
- Drop-down with regulation shutter
- Adjustable stainless steel deflector
- Polyethylene lid with locking hooks
- Lashing straps
- Battery disconnect
- Use and maintenance manual



Double wall





## OPTIONAL TGS

### OPTIONAL

Attachments and anchoring brackets for the vehicle.



### As standard


Male bracket supplied with the salt spreader, adjustable in height.

### Bumper bracket

**SBH2**



The bumper bracket easily attaches to the underside of your vehicle's bumper or floorboard to allow you to mount the spreader. Fits most vehicles. Powder coated black, corrosion resistant and long lasting


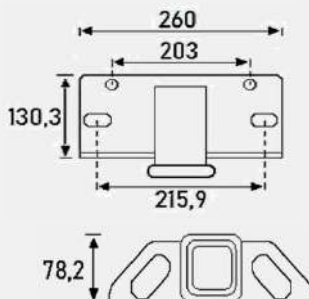


### Bolt-on

**1804055**



Easily and directly mounts to any mounting plate. This receiver tube is welded to a mounting plate and powder coated black to resist corrosion. It features a heavy duty cast steel collar and a stud hole.




### Adapter

**1804060**



**RVA24**




1804060  
RVA24



Tow Hook Mount Brackets, easily mount to 4" square tube. Assembly required. Do not install on aluminum bumper trim covers.

### Extender

**1804005**



3 spreader



2 EXTENDER



1 brackets




Sturdy cast steel extension, with a black powder coated finish, resistant to corrosion. Quick and easy installation without tools. To be combined with brackets



## Third point attachment

**3005345**




Quick and easy installation without tools, fits all common 3 point tractor hitches. The hitch has a corrosion resistant black powder coated finish

## Bumper Extender

**3038520**

For TG507

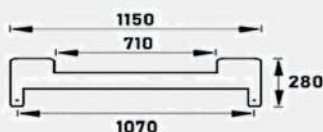

**EXTENDER**

**3038518**

For TG503



The extender increases the support surface, to be able to mount more easily, in vehicles where there is not enough support. The extender is easy to install (using the bolts supplied with the salt spreader) and does not require any modification to the vehicle on which it is installed.

## Vibrators

**3008241**

TGSUVPROA 80LB

**3028195**

TG502 80LB

**3020340**

TG503 200LB



The vibrator shakes the hopper to break up lumps so that all the salt flows freely. It is recommended not to use it more than 30 seconds

## Screw conveyor for fine materials

**3016231**

Only for  
TGSUVPROA



The Fine Materials Auger for the Spreader improves capacity when using finer materials such as calcium chloride and other deicing chemicals. This auger has a more gradual pitch, allowing it to slow the release of these materials to provide even distribution for better coverage and a dramatic reduction in material waste.

## Standard equipment

### SHPE0400




Capacity Liters 350  
Weight / empty Kg 120 - full  $\pm$  550  
Spreading width - mt 1/9

- Anti-corrosion polyethylene hopper
- Regulation controller
- Wiring - 1 battery / 1 motors
- Electric motor disc 12V
- High density polyurethane disc  $\varnothing$  360mm
- Steel auger
- Adjustable steel deflector
- PVC cover sheet
- Lashing straps
- Screening in safety net
- Containment tank for screw conveyor in AISI304 stainless steel, thickness 2.5 mm
- Adjustable steel inverted V
- 80LB Vibrator
- Battery disconnect
- Use and maintenance manual

Double wall



Minimum truck  
bed base mm



### SHPE0750




Capacity Liters 600  
Weight / empty Kg 122 - full  $\pm$  900  
Spreading width mt 1/9

- Anti-corrosion polyethylene hopper
- Regulation controller
- Wiring - 1 battery / 1 motors
- Electric motor disc 12V
- High density polyurethane disc  $\varnothing$  360mm
- Steel auger
- Adjustable steel deflector
- PVC cover sheet
- Lashing straps
- Screening in safety net
- Containment tank for screw conveyor in AISI304 stainless steel, thickness 2.5 mm
- 80LB Vibrator
- Battery disconnect
- Use and maintenance manual

Double wall



Minimum truck  
bed base mm



### SHPE1000





Capacity Liters 800  
Weight / empty Kg 155 - full  $\pm$  1100  
Spreading width mt 1/9

- Anti-corrosion polyethylene hopper
- Regulation controller
- Wiring - 1 battery / 1 motors
- Electric motor disc 12V
- High density polyurethane disc  $\varnothing$  360mm
- Steel auger
- Adjustable steel deflector
- PVC cover sheet
- Lashing straps
- Screening in safety net
- Containment tank for screw conveyor in AISI304 stainless steel, thickness 2.5 mm
- Adjustable steel inverted V
- 80LB Vibrator
- Battery disconnect
- Use and maintenance manual

Double wall



Minimum truck  
bed base mm





## SHPE1500




Capacity Liters 1200  
Weight / empty Kg 235 - full  $\pm$  1500  
Spreading width mt 1/9

- Anti-corrosion polyethylene hopper
- Regulation controller
- Wiring - 1 battery / 1 motors
- Electric motor disc 12V
- High density polyurethane disc  $\varnothing$  360mm
- Steel auger
- Adjustable steel deflector
- PVC cover sheet
- Lashing straps
- Screening in safety net
- Containment tank for screw conveyor in AISI304 stainless steel, thickness 2.5 mm
- Adjustable steel inverted V
- 80LB Vibrator
- Battery disconnect
- Use and maintenance manual



Double wall

Minimum truck  
bed base mm



## SHPE2000




Capacity Liters 1600  
Weight / empty Kg 428 - full  $\pm$  2300  
Spreading width mt 1/9

- Anti-corrosion polyethylene hopper
- Regulation controller
- Wiring - 1 battery / 1 motors
- Electric motor disc 12V
- High density polyurethane disc  $\varnothing$  360mm
- Steel auger
- Adjustable steel deflector
- PVC cover sheet
- Lashing straps
- Screening in safety net
- Containment tank for screw conveyor in AISI304 stainless steel, thickness 2.5 mm
- Adjustable steel inverted V
- 80LB Vibrator
- Battery disconnect
- Use and maintenance manual



Double wall

Minimum truck  
bed base mm



## PRO2500




Capacity Liters 2000  
Weight / empty Kg 360 - full  $\pm$  290  
Spreading width mt 1/9

- Anti-corrosion polyethylene hopper
- Regulation controller
- Wiring - 1 battery / 1 motors
- Electric motor disc 12V
- High density polyurethane disc  $\varnothing$  360mm
- Steel auger
- Adjustable steel deflector
- PVC cover sheet
- Lashing straps
- Screening in safety net
- Containment tank for screw conveyor in AISI304 stainless steel, thickness 2.5 mm
- Adjustable steel inverted V
- 200LB Vibrator
- Battery disconnect
- Use and maintenance manual



Double wall

Minimum truck  
bed base mm

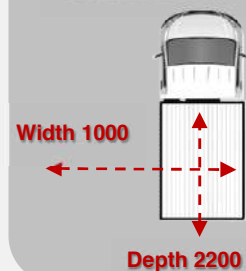

## PRO4000




Capacity Liters 3200  
Weight / empty Kg 406 - full  $\pm$  4200  
Spreading width mt 1/9

- Anti-corrosion polyethylene hopper
- Regulation controller
- Wiring - 1 battery / 1 motors
- Electric motor disc 12V
- High density polyurethane disc  $\varnothing$  460mm
- Steel auger
- Adjustable steel deflector
- PVC cover sheet
- Lashing straps
- Screening in safety net
- Containment tank for screw conveyor in AISI304 stainless steel, thickness 2.5 mm
- Adjustable steel inverted V
- 450LB Vibrator
- Battery disconnect
- Use and maintenance manual


Double wall



Minimum truck bed  
base mm

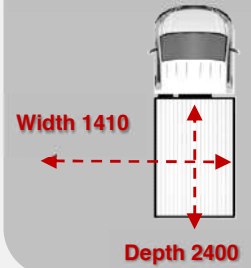

## PRO6000

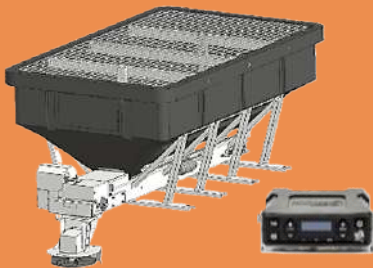


Capacity Liters 4800  
Weight / empty Kg 600 - full  $\pm$  6400  
Spreading width mt 1/9

- Anti-corrosion polyethylene hopper
- Regulation controller
- Wiring - 1 battery / 1 motors
- Electric motor disc 12V
- High density polyurethane disc  $\varnothing$  460mm
- Steel auger
- Adjustable steel deflector
- Lashing straps
- Screening in safety net
- Containment tank for screw conveyor in AISI304 stainless steel, thickness 2.5 mm
- Adjustable steel inverted V
- 900LB Vibrator
- Battery disconnect
- Use and maintenance manual

Double wall



Minimum truck bed  
base mm

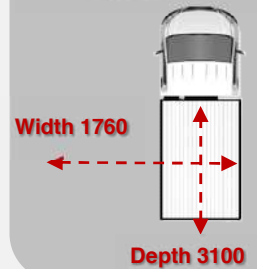

## PRO8000




Capacity Liters 6500  
Weight / empty Kg 760 - full  $\pm$  9000  
Spreading width mt 1/9

- Anti-corrosion polyethylene hopper
- Regulation controller
- Wiring - 1 battery / 1 motors
- Electric motor disc 12V
- High density polyurethane disc  $\varnothing$  460mm
- Steel auger
- Adjustable steel deflector
- Lashing straps
- Screening in safety net
- Containment tank for screw conveyor in AISI304 stainless steel, thickness 2.5 mm
- Adjustable steel inverted V
- 900LB Vibrator
- Battery disconnect
- Use and maintenance manual

Double wall



Minimum truck bed  
base mm

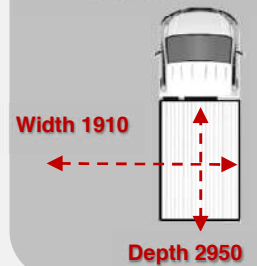



## OPTIONAL SHPE - PRO

### Hook lift for trucks

**3050559**

**PRO 2500**


Available in black powder coated finish

Simplify loading, unloading and storing your medium-sized SaltDogg® spreader

Adjustable legs to suit the height of the platform

Integrated rollers make loading and unloading the spreader easy and smooth.

Rugged 1/4" structural steel tubing for durability

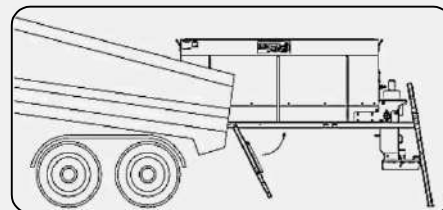

### Rear camera kit, for spreading control

**8883010**

**PRO - SHPE**



Screen




7 inches



The system's night vision camera features a 120° viewing angle. It mounts to your license plate using your vehicle's OEM license plate holes, no drilling required. The 7-inch color monitor displays at a resolution of 800x480 and features multiple mounts to accommodate many configurations. A wireless remote control with a 3m range and a 19m cable are also included. The camera is IP68 rated for water and dust resistance

### Orange flashing light with magnet

**SL501A**



4 inch diameter 40 LED flashing light has two flash modes that keep your vehicle visible. The light can be permanently mounted or magnetically attached depending on the application. This 12-24V amber light plugs into an accessory socket and has a 3m long cable for mounting versatility

### LED rear lights

**1492110**



35W LED spotlight diameter 5 inches The rubber housing protects the light. IP67 rating for water and dust resistance, it is mounted on a galvanized bracket and has a cable length of 2.5 m



## Standard equipment

### MUT60





Weight 180 kg

Moldboard measures mm  
Width 1800 - Height 600

- AISI304 stainless steel wing, 2 mm thick
- Knife in black painted steel, thickness 10 mm
- Frame in black powder coated steel
- Controller
- Wiring cables
- 2 shock-absorbing return springs in painted steel
- Adjustable parking feet
- 2 adjustable slides
- Universal mounting bracket for the vehicle
- Use and maintenance manual



Working  
width mm



- Attachment/Unattachment with the patented and registered **RAPIDLINK®** system **BUYERS**



### MXII



- AISI304 stainless steel wing, 2 mm thick
- Knife in black painted steel, thickness 10 mm
- Frame in black powder coated steel
- Controller
- Wiring cables
- 2 shock-absorbing return springs in painted steel
- Depth lights with arrows
- Adjustable parking feet
- Polyethylene deflector
- 2 adjustable slides
- Universal mounting bracket for the vehicle
- Use and maintenance manual



- Attachment/Unattachment with the patented and registered **RAPIDLINK®** system **BUYERS**



### MXII68

Moldboard  
measures mm


Width 2030 - Height 600

Weight kg  
160



2030

Working  
width mm



### MXII75

Moldboard  
measures mm


Width 2280 - Height 600

Weight kg  
170



2280

Working  
width mm



### MXII80

Moldboard  
measures mm


Width 2450 - Height 600

Weight kg  
180



2450

Working  
width mm



# EXII



- AISI304 stainless steel wing, 2 mm thick
- Frame in black powder coated steel
- Knife in black painted steel, thickness 10 mm
- Controller
- Wiring cables
- 4 shock-absorbing return springs in painted steel
- 2 shock absorbers
- Depth lights with arrows
- Adjustable parking feet
- Polyethylene deflector
- 2 adjustable slides
- Universal mounting bracket for the vehicle
- Use and maintenance manual



- Attachment/Unattachment with the patented and registered **RAPIDLINK®** system **BUYERS**




**EXII80**

**Woldboard  
measures mm**  
Width 2440 - Height 790  
**Weight kg**  
347



**Working  
width mm**




**EXII85**

**Woldboard  
measures mm**  
Width 2590 - Height 790  
**Weight kg**  
356



**Working  
width mm**




**EXII90**

**Woldboard  
measures mm**  
Width 2743 - Height 790  
**Weight kg**  
365




**Working  
width mm**



# CMII



- AISI304 stainless steel wing, 2 mm thick
- Frame in black powder coated steel
- Knife in black painted steel, thickness 16 mm
- Controller
- Wiring cables
- 6 shock-absorbing return springs in painted steel
- 2 shock absorbers
- Depth lights with arrows
- Adjustable parking feet
- Polyethylene deflector
- 2 adjustable slides
- Universal mounting bracket for the vehicle
- Use and maintenance manual

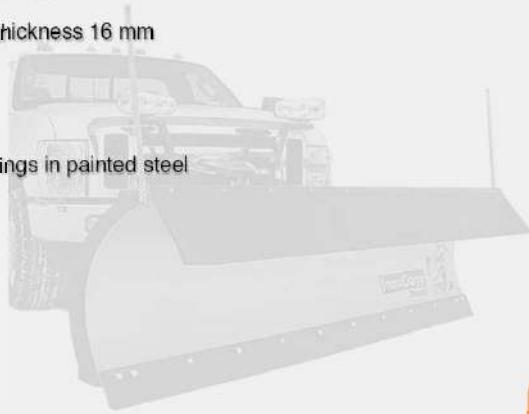

- Attachment/Unattachment with the patented and registered **RAPIDLINK®** system **BUYERS**




**CMII90**

**Woldboard  
measures mm**  
Width 2740 - Height 790  
**Weight kg**  
473



**Working  
width mm**




**CMII100**

**Woldboard  
measures mm**  
Width 3050 - Height 790  
**Weight kg**  
492



**Working  
width mm**




**CMII110**

**Woldboard  
measures mm**  
Width 3350 - Height 790  
**Weight kg**  
510



**Working  
width mm**





## LIQUID SPREADERS

## Standard equipment

**6190110**



PVC bar width mm

Width 190

Pump and platform mm

Width 660 - Depth 370 - Height 300

- Silent 12V electric pump delivers up to 22 litres of liquid per minute
- ON/OFF control button
- PVC spray bar complete with 9 adjustable clip nozzles
- 2 Automotive Wiring, 1 Battery - 1 Button
- Lashing straps
- 1 Rubber connection tube Ø 3/4 inch, 250 cm long, various fittings and tubes
- Use and maintenance manual



Disinfestation - antifreeze



**6190110**



Depth 370

Width 660



## OPTIONAL

**Cask made of resistant, high-density, UV-stabilised polyethylene**

**WSE26**



Capacity  $\nabla$ iters


210

Weight  $\mu$ g

Empty 23 - Full  $\pm$  233



Minimum truck  
bed base mm



Width 570

Depth 940

**82124639**



Capacity  $\nabla$ iters


800

Weight  $\mu$ g

Empty 40 - Full  $\pm$  840



Minimum truck  
bed base mm



Width 990

Depth 1180

**82124649**



**Capacity**  $\nabla$ iters

1230

**Weight**  $\mu$ g


Empty 50 - Full  $\pm$  1280



**Minimum truck  
bed base mm**

Width 1220

Depth 1575



**82124269**



**Capacity**  $\nabla$ iters

2100

**Weight**  $\mu$ g


Empty 73 - Full  $\pm$  2173



**Minimum truck  
bed base mm**

Width 1220

Depth 1980



**6190110**

**W5E26**



**6190120**

**Capacity**  $\nabla$ iters MK

**6190110**

**82124649**



**6190160**

**Capacity**  $\nabla$ iters LMK

**6190110**

**82124639**



**6190150**

**Capacity**  $\nabla$ iters WKK

**6190110**

**82124269**



**6190170**

**Capacity**  $\nabla$ iters MKK

## **KIT - HOSE REEL WITH GUN**

**3039076**



The spring-retractable hose reel and adjustable nozzle spray gun allow you to apply a liquid deicer mixture to sidewalks, steps, bus shelters and other hard-to-reach areas. An adjustable spray nozzle activates the deicer pump on demand. The 1/2-inch diameter, 50-foot hose is spring-retractable on a convenient, compact reel.



Steps



Cleaning bins


## OPTIONAL

### Vehicle Attachments and Anchoring Brackets



#### Bumper bracket


**SBH2**

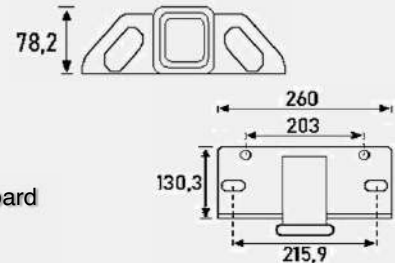

The bumper bracket easily attaches to the underside of your vehicle's bumper or floorboard to allow you to mount the spreader. Fits most vehicles. Powder coated black, corrosion resistant and long lasting

#### Bolt-on

**1804055**

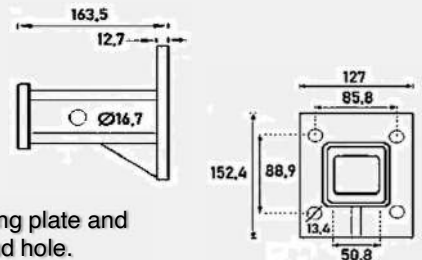


Easily and directly mounts to any mounting plate. This receiver tube is welded to a mounting plate and powder coated black to resist corrosion. It features a heavy duty cast steel collar and a stud hole.

#### Adapter

**1804060**




**RVA24**

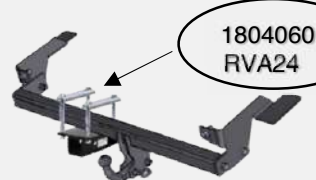


Tow Hook Mount Brackets, easily mount to 4" square tube. Assembly required. Do not install on aluminum bumper trim covers.

#### Extender

**1804005**



3 sprayer



2 EXTENDER




1 brackets



Sturdy cast steel extension, with a black powder coated finish, resistant to corrosion. Quick and easy installation without tools. To be combined with brackets

#### Third point attachment

**3005345**



Quick and easy installation without tools, fits all common 3 point tractor hitches. The hitch has a corrosion resistant black powder coated finish



# The advantages of the Polyethylene HOPPER

• i A 9



The double-walled hopper (only for some models) in polyethylene, ergonomically designed for electric salt spreaders, is made by rotational molding, a process that ensures uniformity and adhesion of the material. It was developed by American technicians with long experience in the sector.

• v



Polyethylene is a strong and lightweight material, ideal for various applications. Its resistance to corrosion and atmospheric agents, ensures low maintenance, reducing costs and extending the life of objects, offering an excellent quality-price ratio.



The hopper is made of polyethylene, a lightweight, corrosion-resistant material with an innovative production technology that increases its resistance and thermal insulation. Compared to traditional models, this hopper allows you to load more salt, covering larger surfaces in less time.

• m



The polyethylene salt spreader hopper, designed by American technicians, is made of high-quality materials and stands out for its ergonomics, resistance and a constant flow of salt to the auger. It combines functionality and aesthetics, offering an innovative, robust and long-lasting product.

## The advantages of the ELECTRIC system

• y



Innovative electrical system, powered directly by the alternator of the vehicle on which it is mounted. There are no additional fuel costs, derived from an auxiliary engine of a traditional system.

• v



The electric system allows for maintenance savings thanks to the greater durability and reliability of the electrical components compared to hydraulic ones. In addition, it offers greater precision in spreading, since it is not affected by the oil temperature, unlike hydraulic systems.



Less noise and environmental pollution. Greater spreading precision thanks to high-performance electric motors controlled by a controller in the cabin.



Our automotive salt spreader wiring harness provides high performance and reliability, with sealed wires and plugs for safe, weatherproof connections. Ideal for effective, long-lasting operation.

• w



The spreader's sealed, direct-drive motors minimize the risk of failure caused by components such as sprockets, pulleys, belts or chains, which can break in extreme conditions. With no fragile parts exposed to the elements, they are designed to provide maximum reliability in cold, snowy and humid environments.

• l



Our controller offers advanced diagnostics to quickly detect problems and malfunctions of the salt spreader, allowing timely interventions and reducing downtime.

## Buyers products manufacturing




With over ten years of experience in the sector, Snow Trading Srl stands out as a reliable point of reference for the sale and after-sales service of equipment dedicated to winter management in Europe. Our collaboration with the prestigious American brand Buyers, a leader in the United States in the production of snow ploughs and salt spreaders with over 30 years of excellence, guarantees us products of the highest quality and reliability. The Buyers headquarters in Ohio, on the border with Canada, and the experience of their technicians in the harsh North American conditions, allow us to offer highly professional solutions, continuously updated to face the challenges of winter with efficiency and safety. Choosing Snow Trading means relying on a competent partner, ready to support you at every stage, to guarantee maximum performance and peace of mind.

## Distributors for EUROPE of the BUYERS brand



Headquarters

 **Snow Trading srl** Since 2012 present on the market of ice and snow solutions on the road





Commercial and spare parts warehouse

Via Caduti Senza Croce N° 17 41126


Modena (MO) ITALY




 +39 059 512252

 +39 328 739 0424

 [info@snowtrading.eu](mailto:info@snowtrading.eu)

 Commercial

 +39 335 8217618



[www.snowtrading.eu](http://www.snowtrading.eu)